




FLASH



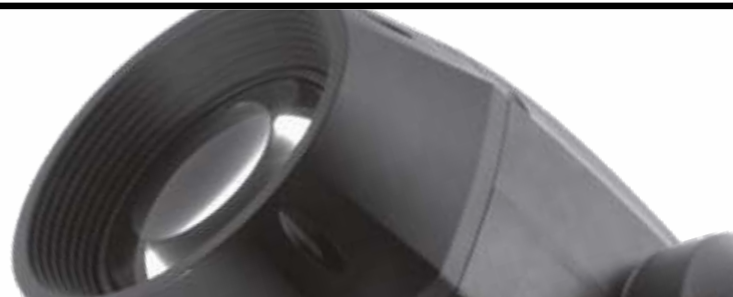

17R CMY BEAM-SPOT-WASH

Moving Head (2pcs set)

[F7100109]



LOW NOISE

Power: 500W; 85 - 265V, 50/60Hz
 Lamp type: 17R
 Beam angle: 3° - 53°
 Color wheel: 9 colors + white (including UV, CTO, CTC);
 CMY color mixing
 Prism: 6-facet linear, 16-facet round (both rotating)
 GOBO wheel: static: 11 patterns + open;
 rotating: 7 patterns + open;
 Animation wheel: 5 effects
 PAN range: 540°
 TILT range: 270°
 Number of DMX channels: 24 / 32
 Features: Smooth CMY mixing, ZOOM,
 electronic focus, frost filter
 AC IN/OUT: powerCON
 DMX IN/OUT: XLR - 3 pin
 Control interface: Wheel controller, touchscreen
 Display: Color LCD
 Cooling: Active
 IP rating: IP20
 Dimensions: 64cm x 41cm x 31cm
 Weight: 77kg (2pcs + CASE); 24kg (1 pc)
 Set includes: CASE (free), Power cord, Mounting brackets



FL-233 - BEAM 7R

Moving Head (2pcs + CASE)

[F7100093]: FL-233 - 7R

FL-233 BEAM THUNDERBOLT is equipped with a revolutionary 7R 230W discharge lamp. This is the head, which light output is comparable to devices with significantly more powerful discharge lamps.

Power consumption: 350W; AC IN/OUT: powerCON
Beam angle: 0-4° (8° with Frost filter)
Number of DMX channels: 16
Prism: 16-facet, rotating
Frost filter
Color: Color wheel - 14 colors + white
GOBO wheel: 17 patterns + open, GOBO Shake
DMX IN/OUT: XLR - 3 pin
Dimensions: 50cm x 37cm x 32cm
Weight: 16,4kg



FL-330 BEAM 15R

Moving Head (2pcs + CASE)

[F7100106]

FL-330 BEAM is equipped with a revolutionary 15R discharge lamp. This is the head, which light output is comparable to devices with significantly more powerful discharge lamps.

Power consumption: 400W; AC IN: powerCON
Beam angle: 0° - 4° (8° with Frost filter)
Number of DMX channels: 18
Prism: 8-facet, rotating + 24-facet, rotating
Color: Color wheel - 13 colors + white
GOBO wheel: 13 patterns + open, GOBO Shake
Frost filter
DMX IN/OUT: XLR - 3 pin
Dimensions: 87cm x 38cm x 29cm
Weight: 17kg



15R BEAM-SPOT-WASH

Moving Head (2pcs + CASE)

[F7100080]

Power consumption: 470W
Power supply voltage: 100 - 240V, 50/60Hz
Lamp type: 15R
Beam angle: 0° - 45°
Color: Color wheel - 13 colors + white
Flash frequency: 0,5Hz - 9Hz
Prism: 8-facet, 16-facet, 24-facet (rotating)
GOBO wheel: static: 17 patterns + open; rotating: 12 patterns + open
PAN range: 540°
TILT range: 270°
Number of DMX channels: 16 / 24
Features: ZOOM, electronic focus, frost filter
AC IN/OUT: powerCON
DMX IN/OUT: XLR - 3 pin
Control interface: Wheel controller
Display: LCD with Touchscreen
Cooling: Active
Dimensions: 59cm x 39cm x 38cm
Weight: 19kg
Set includes: CASE, Power cord, Mounting brackets



3R BEAM-SPOT-WASH

Moving Head

[F7100505]



Power consumption: 250W
Power supply voltage: 110 - 240V, 50/60Hz
Lamp type: 3R
Beam angle: 2° - 40°
Color: Color wheel - 13 colors + white (including UV & CTO)
Prism: 6-facet linear, 8-facet round (both rotating)
GOBO wheel: static: 14 patterns + open;
rotating: 9 patterns + open
PAN range: 540°
TILT range: 270°
Number of DMX channels: 16 / 24
Features: ZOOM, electronic focus, frost filter
AC IN/OUT: powerCON
DMX IN/OUT: XLR - 3 pin, XLR - 5 pin
Control interface: Wheel controller, touchscreen
Display: Color LCD
Cooling: Active
Dimensions: 54cm x 33cm x 25cm
Weight: 13kg
Set includes: Power cord, Mounting brackets



200W 3in1 - BEAM-SPOT-WASH

LED Moving Head

[F7100498]

This moving head features a prism, a frost filter, 9 colors and 9 different rotating gobos which can be rotated to create a variety of effects. Each shape or pattern can also be run via DMX or as part of the internal programs. Perfect for installations in bars, nightclubs, stage shows and concerts.

Power: 300W; 100 - 240V, 50/60Hz LED: 200W, white

Beam angle: 4° - 7° (GOBO reduction)

7° - 21° (SPOT)

21° - 31° (with Frost filter)

Prism: 4-facet, rotating

GOBO wheel: 7 patterns + open (static); 9 patterns + open (rotating)

AC IN/OUT: powerCON

Dimensions: 54cm x 35cm x 24cm

Weight: 14,5kg



150W 3in1 - BEAM-SPOT-WASH

LED Moving Head

[F7100506]

[F7100515] - 4pcs set (with CASE)

LED moving Head equipped with an fixed-lens optical system which allows to change beam angle from 2° up to 31° (using frost filter and/or gobo wheel). This fixture includes also a 3-facet prism, static and rotating GOBO wheels (both with 10Hz shake effect) and various dimming curves for smooth dimming.

Power: 190W; 100 - 240V, 50/60Hz; AC IN/OUT: powerCON

LED: 1 x 150W Single-color LED with color wheel (8-colors)

Beam angle: 2° - 13° (static GOBO reduction)

13° - 21° (magnify lens)

21° - 31° (with Frost filter)

Number of DMX channels: 17 / 20

DMX IN/OUT: XLR - 3 pin

Dimensions: 46cm x 29cm x 26cm

Weight: 9,5kg



LOW NOISE





330W CMY BEAM-SPOT-WASH LED Moving Head (2pcs set)

[F7100509]



LOW NOISE

Power consumption: 400W

Power supply voltage: 100 - 240V, 50/60Hz

LED: Single-color 330W

Beam angle: 5° - 42° (without Hotpoint effect)

Color: 6 separate color wheels:

3 wheels with 4 colors + white each (with UV, CTO & CTC)

Cyan, Magenta, Yellow wheels with smooth mixing feature

Flash frequency: 1Hz - 25Hz

Prism: 3-facet (rotating)

GOBO wheel: static: 10 patterns + open; rotating: 5 patterns
+ open

PAN range: 540°

TILT range: 270°

Number of DMX channels: 22 / 27 / 30

Features: Smooth CMY color mixing ZOOM,
electronic focus, frost filter, iris

AC IN: powerCON

DMX IN/OUT: XLR - 3 pin + 5 pin

Control interface: 5 buttons

Display: LCD Matrix

Cooling: Active

Dimensions: 82cm x 59cm x 54cm

Weight: 24kg

150W SPOT LED Moving Head

[F7100497]

[F7100501] - 4pcs set (with CASE)

This moving head is characterized by advanced design and processing technique. It allows to create accurate bright and sharp beam. Equipped with 2x7 GOBO wheels, 8 colors, a double prism and WATER / FIRE effect.

Power consumption: 300W

Power supply voltage: 110 - 220V, 50/60Hz

LED: 150W, white

PAN/TILT range: 540°/270°

Number of DMX channels: 16

Prism: 2 rotating prisms

GOBO wheel: 2 GOBO wheels (7+7 patterns)

AC IN/OUT: powerCON

Dimensions: 50cm x 40cm x 33cm

Weight: 10kg



LOW NOISE



90W SPOT + GOBO-ZOOM LED Moving Head

[F7100514]

SPOT type moving head equipped with an additional lens to change the beam angle or magnify the displayed GOBO pattern. Equipped with 2 separate GOBO wheels and electronic focus adjustment.

Power: 150W; 230V

LED: 1x90W Single Color + color wheel with 7 colors

Beam angle: 12° - 19°

Frost filter

PAN/TILT range: 540°/210°

Number of DMX channels: 16

AC IN: IEC - C14

DMX IN/OUT: XLR - 3 pin

Dimensions: 36cm x 25cm x 25cm

Weight: 6,7kg



90W DIAMOND - ROTO PRISM & 2x GOBO LED Moving Head

[F7100502]

[F7100510] - 4pcs set (with CASE)

A small moving head with a LED light source with great possibilities. Equipped with two GOBO wheels (including one rotary) and a 3-faced rotating prism.

Power consumption: 100W

Power supply voltage: 100 - 240V, 50/60Hz

LED: 90W Single color with color wheel (7 colors + white)

PAN/TILT range: 540°/270°

Beam angle: 13° - 21° (with prism function)

Number of DMX channels: 15

AC IN/OUT: powerCON

DMX IN/OUT: XLR - 3 pin

Dimensions: 36cm x 30cm x 21cm

Weight: 6kg



60W SPOT LED Moving Head

[F1700044]

This moving head features a prism, 7 colors, 6 different gobos which can be rotated to create a variety of effects. Each shape or pattern can also be run via DMX or as part of the internal programs. Perfect for installations in bars, nightclubs, stage shows and concerts.

Power consumption: 80W

Power supply voltage: 110 - 240V, 50/60Hz

LED: 60W, white

PAN/TILT range: 630°/270°

Prism: 3-facet

GOBO wheel: 6 patterns + open, rotating

AC IN: IEC - C14

Dimensions: 35cm x 26cm x 26cm

Weight: 7,4kg



Kaleidoscope 19x15W BIG-EYE **LED Moving Head RGBW 4in1 OSRAM** [F7100078]

Power consumption: 300W
Power supply voltage: 90 - 240V
Voltage frequency: 50/60Hz
LED: 19x15W, 4in1
Color: RGBW
Beam angle: 4° - 60°
Dimming: Linear: 0 - 100%
Flash frequency: 1Hz - 20Hz
PAN range: 540°
TILT range: 210°
Number of DMX channels: 17 / 32 / 89
Display: LCD Matrix
Control interface: 4 buttons
Operating modes: DMX, Sound controlled, Master/Slave
AC IN/OUT: powerCON
DMX IN/OUT: XLR - 3 pin
IP Rating: IP20
Housing made: ABS
Cooling: Active
Dimensions: 47cm x 40cm x 27cm
Weight: 17,5kg



Kaleidoscope 7x15W **LED Moving Head RGBW 4in1 OSRAM** [F7100075]

Moving head equipped with 7x15W LED's, compact and lightweight. The device has an independent control of each of the 7 LED's and rotating lenses wheel which allows to achieve the effect of kaleidoscope and change the beam angle in the range of 4°-60°.

Power consumption: 150W
Power supply voltage: 90 - 260V, 50/60Hz
LED: 7x15W, 4in1, RGBW
Beam angle: 4°-60°
PAN/TILT range: 540°/210°
Number of DMX channels: 25 / 55
Features: 7 independently controlled LED sections, kaleidoscope effect, ZOOM, WASH, BEAM
Dimensions: 37cm x 26cm x 24,5cm
Weight: 8,2kg



Kaleidoscope 6x15W **LED Moving Head RGBW 4in1 OSRAM** [F7100069]

Small moving head equipped with a rotary dial with lenses allowing to generate unusual light effects, such as kaleidoscope or moving star, unprecedented in the heads of this type. Osram LED 4in1 applied provide high brightness and emphasize the quality of created effects. The small size makes the device ideal for use in small and medium-sized clubs, discos and on small stages.

Power consumption: 100W
Power supply voltage: 100 - 240V, 50/60Hz
LED: 6x15W, 4in1
Color: RGBW
Beam angle: 10°
PAN range: 540°
TILT range: 220°
Number of DMX channels: 11 / 14
Operating modes: DMX, Automatic, Sound controlled
AC IN/OUT: powerCON
DMX IN/OUT: XLR - 3 pin
Control interface: 4 buttons
Display: LCD Matrix
Dimensions: 25cm x 22cm x 23cm
Weight: 4,1kg



12x40W ZOOM **LED Moving Head 4in1 RGBW** [F7100520]

LED Moving Head with 4,5° to 45° zoom range, strong beam effect and high quality wash effect. Equipped with 4in1 RGBW LEDs and auto temperature control system with big cooling fan.

Power consumption: 600W
Power supply voltage: 100 - 240V, 50/60Hz
LED: 12x40W, 4in1, RGBW
Beam angle: 4,5° - 45°
Color LCD Display
Control: DMX, RDM, Auto, Master/Slave
Number of DMX channels: 11 / 17 / 18 / 58
AC IN/OT: powerCON
DMX IN/OUT: XLR - 3 pin
Weight: 14,5kg



7x40W ZOOM **LED Moving Head 4in1 RGBW** [F7100519]

Moving head with 40W high power individually controlled LEDs. Equipped with high efficiency optical lens system with 5°-50° zoom range. Lightweight & compact housing, quiet, smooth and fast PAN/TILT movement, low noise and efficient FAN cooling system, built-in pre-programs with macro effects.

Power consumption: 350W
Power supply voltage: 100 - 240V, 50/60Hz
LED: 7x40W, 4in1, RGBW
Beam angle: 5° - 50°
Number of DMX channels: 11 / 17 / 18 / 38
Individual control for each LED
AC IN/OUT: powerCON
DMX IN/OUT: XLR - 3 pin
Weight: 7,5kg



MATRIX HEAD

LED Moving Head RGBW 4in1

[F1700069]: 9x12

A device with strong diodes and separate control of each LED. Richness of colors and built-in effects can be used in any lighting installation. The head cooperates with a DMX controller, automatically, by sound control or in Slave mode.

Power consumption: 140W
 Power supply voltage: 90 - 260V, 50/60Hz
 LED: 9x12W, RGBW, 4in1
 PAN/TILT range: NO LIMIT
 Number of DMX channels: 1 / 16 / 48
 AC IN/OUT: powerCON
 DMX IN/OUT: XLR - 3 pin
 Dimensions: 39cm x 27cm x 15cm
 Weight: 6,2kg



BEAM 80W

LED Moving Head RGBW

[F7100518]

A device equipped with all modern moving head features such as two rotating prisms (8-facet and 16-facet), a rotating GOBO wheel with 9 patterns and color wheel with 9 colors + white (with half color feature). A great alternative for 2R discharge lamp moving heads.

Power: 120W; 100 - 240V, 50/60Hz
 LED: 1x80W, Single Color OSRAM
 Beam angle: 1,8°
 Dimming: Linear: 0 - 100%
 Strobe: 1-25Hz
 Number of DMX channels: 15
 AC IN/OUT: powerCON
 DMX IN/OUT: XLR - 3 pin
 Weight: 10kg



BEAM 60W

LED Moving Head RGBW 4in1 OSRAM

[F7100073]

This very special device offers an enormous 60W power of light concentrated in 6° beam angle. What is more, it's a 4in1 and it possesses all of the standard LED moving head functions.

Power consumption: 120W
 Power supply voltage: 90 - 260V, 50/60Hz
 LED: 60W, RGBW, 4in1, COB
 Beam angle: 6°
 PAN/TILT range: NO LIMIT
 Number of DMX channels: 18
 AC IN/OUT: IEC - C14/C13
 DMX IN/OUT: XLR 3-pin
 Dimension: 30cm x 22cm x 22cm
 Weight: 5,8kg



4 BEAM RGBW

LED 4x Micro Moving Head 4x10W LUMILUX

[F7200190]

A perfect combination of 4 moving heads and LED bar. Each head can be controlled separately via DMX signal. The ideal solution for DJ, clubs, discos and small stages.

Power consumption: 180W
 Power supply voltage: 110 - 220V, 50/60Hz
 LED: 4x10W, RGBW
 Beam angle: 2,6°
 PAN/TILT range: 540°/270°
 Number of DMX channels: 9 / 19
 AC IN/OUT: powerCON
 DMX IN/OUT: XLR - 3 pin
 Dimensions: 25,5cm x 104cm x 10cm
 Weight: 10kg



ZOOM WASH 19x15W - 3 sections

LED Moving Head RGBW 4in1

[F7100516]

[F7100512] - 4pcs set (with CASE)

WASH moving head with 8-50° zoom, based on high-quality diodes. This device offers features such as: built-in programs, the possibility of changing rotation and tilt speed or adjusting rotation and tilt direction.

Power: 280W; 90 - 260V, 50/60Hz

LED: 19x15W, 4in1, RGBW

Beam angle: 8° - 45°

PAN/TILT range: 540°/210°

Number of DMX channels: 16 / 24

3 separately controlled sections

AC IN: powerCON

DMX IN/OUT: XLR - 3 pin

Dimensions: 39cm x 32cm x 25cm

Weight: 10kg



7x10W Mini WASH

LED Moving Head RGBW 4in1

[F7100087]

This compact moving head uses a powerful 7x10W LED's. It can be operated by 9 or 14 DMX channels or one of the stage friendly internal programs on either auto or sound controlled mode. It is ideal for small stages, bars, nightclubs, as well as for mobile DJs and bands.

Power consumption: 70W

Power supply voltage: 110 - 230V, 50/60Hz

LED: 7x10W, 4in1, RGBW

Beam angle: 25°

Number of DMX channels: 9 / 14

AC IN: IEC - C14

DMX IN/OUT: XLR - 3 pin

Dimensions: 27cm x 23cm x 23cm

Weight: 3,5kg



7x15W Mini WASH UV

LED Moving Head RGBW+UV 5in1

[F7100104]

This compact moving head uses a 7x15W 5in1 LED's which includes UV as a separate color. It can be operated via DMX or by one of the stage friendly internal programs on either auto or sound controlled mode.

Power consumption: 110W

Power supply voltage: 90 - 240V, 50/60Hz

LED: 7x15W, 5in1, RGBW+UV

Dimming: Linear: 0 - 100%

PAN/TILT range: 540°/180°

Number of DMX channels: 9 / 14

AC IN: IEC - C14

DMX IN/OUT: XLR - 3 pin

Dimensions: 27cm x 23cm x 23cm

Weight: 3,5kg



4x15W ZOOM

LED Moving Head RGBW 4in1

[F1700076]

A small moving head with four powerful LEDs and a unique (for this size) ZOOM function. The ability to control the width of the light beam in combination with the smooth rotation in two axes in the range of 540° / 270° makes this device convenient and versatile for small stages applications and in clubs or theaters.

Power consumption: 65W

Power supply voltage: 95 - 240V, 50/60Hz

LED: 4x15W, 4in1, RGBW

PAN/TILT range: 540°/270°

Number of DMX channels: 10 / 12 / 15

AC IN/OUT: IEC - C14/C13

DMX IN/OUT: XLR - 3 pin

Dimensions: 27cm x 15cm x 17cm

Weight: 3,5kg



VIRTUOZO **LED Moving Head**

[F7100077]: 16x25W

[F7100086]: 9x30W

This innovative LED Moving Heads provides a light of high power. Each LED diode is controllable individually, which allows the user to bring even more designing options.

Power consumption: 400W

Power supply voltage: 90 - 260V, 50/60Hz

LED: 16x25W, 4in1, RGBY

Display: Color LCD

Beam angle: 3°

PAN range: 540°/NO LIMIT

TILT range: 360°/NO LIMIT

Number of DMX channels: 18 / 30 / 82

Operating modes: DMX512, Auto, Sound-controlled, Master / Slave

Features: each LED controllable individually

AC IN/OUT: powerCON

DMX IN/OUT: XLR - 3 pin

IP Rating: IP20

Dimensions: 46cm x 45cm x 31cm

Weight: 16,5kg



INFINITE BAR 5x15W No Limit **LED Moving Head RGBW 4in1 OSRAM**

[F7100097]

A new innovational product, a combination of LED bar and a moving head. It will satisfy both professionals and a bit less experienced customers. Five small moving heads offering RGBY colors and multiple effects with no limit Tilt range. The device also has 4 standard operating modes and up to 4 DMX channel modes, each beam can be controlled individually. A perfect choice for a lighting effects passionate.

Power consumption: 70W

Power supply voltage: 110 - 230V, 50/60Hz

LED: 5x12W, 4in1, RGBW

Beam angle: 10°

PAN range: 540°

TILT range: NO LIMIT

Number of DMX channels: 6 / 18 / 29 / 31

Operating modes: DMX512, Auto, Sound-controlled, Master / Slave

Features: each HEAD controllable individually

DMX IN/OUT: XLR - 3 pin

IP Rating: IP20



INFINITE BAR 6x15W No Limit

LED Moving Head RGBW 4in1 OSRAM

[F7100098]: 6x15W

A brand new product offering the functions of a classic moving head and a LED bar. It provides RGBW colors and 4 standard operating modes like auto or sound control mode. Each head can be controlled individually without Tilt limit.

Power consumption: 80W

Power supply voltage: 110 - 230V, 50/60Hz

LED: 5x12W, 4in1, RGBW

Beam angle: 10°

PAN range: 540°

TILT range: NO LIMIT

Operating modes: DMX512, Auto, Sound-controlled, Master / Slave

Features: each HEAD controllable individually

DMX IN/OUT: XLR - 3 pin



Spyder Mini 3-HEAD

LED Mini Moving Head 9x12W RGBW 4in1

[F7100103]

Small and very effective Spyder moving head of high power, with richness of colors and lighting effects.

Power consumption: 110W

Power supply voltage: 110 - 220V, 50/60Hz

LED: 9x12W, 4in1, RGBW

PAN/TILT range: NO LIMIT/90°

Number of DMX channels: 16 / 24 / 48

Operating modes: Auto, DMX, Sound control, Master/Slave

AC IN/OUT: powerCON

DMX IN/OUT: XLR - 3 pin

IP Rating: IP22

Dimensions: 15,5cm x 28,5cm x 27,5cm

Weight: 5kg



Spyder 3-HEAD

LED Moving Head 9x10W RGBW 4in1

[F1700071]

Device equipped with 9 CREE 10W RGBW LED's with separate control of each light beam. A rich library of built-in effects and unlimited PAN rotation allows to use the device both in the club and on stage and generate stunning effects with single device.

Power consumption: 180W

Power supply voltage: 110 - 220V, 50/60Hz

LED: 9x10W, 4in1, RGBW

PAN/TILT range: NO LIMIT/185°

Number of DMX channels: 14 / 43

AC IN/OUT: powerCON

DMX IN/OUT: XLR 3-pin

Weight: 14,5kg



LOGO Projector

LED Effect 30W

[F7300229]

A small handy device meant for projecting symbols on surfaces of many kinds. A pattern (Gobo) that is placed inside can be easily changed and the projector may do really well for instance as an advertisement of a company, a shop or a product.

Power supply voltage: 110 - 220V, 50-60Hz

LED: 1x50W, white,

FOCUS: Manual

GOBO wheel: replaceable, rotating GOBO holder

Operating modes: Static GOBO, Rotating GOBO

Additional information: The diameter of the gobo (total):

48mm, max logo diameter: 23mm

AC IN: integrated power cord

Height: 22cm x 12cm x 12cm



LED PAR 64 IP65 ver.II

18x10W RGBW 4in1

[F7100310]

Designed for outdoor use, for example to illuminate the facades of buildings. It can display static colors or change the colors in automatic mode. Mighty power diodes in combination with the lack of a fan result in a professional lighting. In the device there are all the standard functions: DMX, auto and sound control.

Power supply voltage: 110 - 240V, 50/60Hz

LED: 18x10W, 4in1, RGBW

DMX Channel modes: 4 / 8

AC IN/OUT: dedicated IP65 power plug (AC IN with unischuko adapter included)

DMX IN: dedicated IP65 DMX plug (3-pin XLR adapter included)

DMX OUT: dedicated IP65 DMX plug

IP Rating: IP65

Dimensions: 24,5cm x 29,5cm x 23cm

Weight [kg]: 4,2



LED PAR 64 ZOOM IP65

18x12W RGBW 4in1

[F7100250]

PAR 64 4in1 RGBW with zoom opportunity of high quality. Mighty power diodes in combination with the lack of a fan result in a professional lighting. In the device there are all the standard functions: DMX, auto and sound control.

Power consumption: 160W

Power supply voltage: 110 - 240V, 50/60Hz

LED: 18x12W, 4in1, RGBW

ZOOM: Yes

Number of DMX channels: 5/9

IP Rating: IP65

Dimensions: 34cm x 30cm x 26cm

Weight: 8,4kg



LED PAR 64 ALU CAST

RGBW 4in1 / RGBWA 5in1

[F7100308]: 18x10W RGBW 4in1

[F7100315]: 18x15W RGBW+Amber 5in1

LED PAR in a robust aluminum housing. The use of 18 LED with 10W/15W of power allowed to obtain high brightness while maintaining optimal parameters of power consumption. Strong bracket allows for stable positioning of the reflector on the ground or on the suspension using a special clamp (not included).

Power consumption: 140W / 200W

Power supply voltage: 100 - 240V, 50/60Hz

LED: 18x10W, 4in1, RGBW or 18x15W, 5in1, RGBW+Amber

Beam angle: 25°

Number of DMX channels: 4 / 8

AC IN: Integrated power cord

DMX IN/OUT: XLR - 3 pin

Dimensions: 35cm x 28cm x 35cm

Weight: 2,8kg



LED PAR 56 Slim 7x10

RGBW

[F7100316]: Integrated power cord

[F7100317]: IEC C13/C14 power plug in/out

A compact unit with super bright RGBW LEDs (7x10W). Perfect for small stages, clubs or discos. Available also with IEC C13/C14 power plug in/out.

Power supply voltage: 110 - 220V, 50/60Hz

LED: 7x10W, 4in1, RGBW

Display: LED - 4 characters

Control interface: 4 buttons

Operating modes: Auto, DMX, Sound control

AC IN: integrated power cord or IEC C13/C14 in/out

DMX IN/OUT: XLR - 3 pin

Housing made: ABS

Dimensions: 17,5cm x 17,5cm x 9,5cm

Weight: 0,6kg



LED WASHER IP34 - 8 sections

216 LED / 24x3W RGB 3in1

[F7200193] - 216 LED

[F7200194] - 24x3W RGB 3in1

Universal device for use both indoor and outdoor events (under the roof, ensuring proper working conditions). Solidly constructed, robust design combined with good parameters of light provides great versatility and allows you to use the device in a variety of conditions, from the wedding hall, the concert hall to the disco.

Power consumption: 20W / 80W (F7200197)

Power supply voltage: 110V - 240V, 50/60Hz

LED: 216x10mm / 24x3W 3in1

Beam angle: 15°

Number of DMX channels: 3 / 7 / 28

AC IN/OUT: IEC - C14/C13

DMX IN/OUT: XLR 3-pin

Dimensions: 8cm x 108cm x 6cm

Weight: 1,4kg



LED Wall WASHER 9x10W IP65

RGBW 3 sections

[F7200169]

LED washer mainly intended for outdoor use. Waterproof housing in association with the ability to produce a wide range of colors makes the device ideal for architectural lighting, backlighting sculptures and monuments or gardens.

Power consumption: 90W

Power supply voltage: 110 - 240V, 50/60Hz

LED: 9x10W, 4in1, RGBW

Flash frequency: 0Hz - 20Hz

Operating modes: DMX, Automatic, Master/Slave

AC IN/OUT: dedicated IP65 power plug (adapter)

DMX IN/OUT: dedicated IP65 DMX plug (XLR adapter)

Dimensions: 8cm x 101cm x 7cm

Weight: 2,8kg



LASER 1000 SD CARD

1000mW 3D RGB

[F4000158]

Laser effect equipped with SD card reader, thanks to which it is possible to design and reproduce any animation or logotype. The device also has a large amount of built-in effects.

Power supply voltage: 100-240V, 50/60HZ

Power consumption: 40 W

Operating modes: auto, music, DMX

Scan angle: +/- 120° max,

15KPPS high-speed optical scanner

Patterns: grating effects, gobos

Dimensions: 30cm x 26cm x 18cm

Weight with packaging: 2,4 kg



LED PIN SPOT DMX

12W CREE RGBW 4in1

[F7300213]: Black

[F7300214]: White

Reflector of small size produces a clear, narrow beam of light that is ideal for spot lighting small parts, surfaces, fragments of works of art, shop displays. It will also work on small stages, clubs or bars. Thanks to it there will be a possibility to highlight the less visible parts or to create a unique atmosphere in the room and create unusual lighting arrangement.

Power supply: 230V, 50/60Hz

LED: 12W, RGBW, 4in1, CREE

Beam angle: 5°

Controll: auto, DMX

Dimensions: 14,3cm x 10cm x 6cm

Weight: 0,5kg



FLM-600 LED Fog Machine

[F5100317]: Red
[F5100316]: Green
[F5100315]: Blue
[F5100318]: White

Mini smoke machine with built-in LEDs to achieve the effect of colored cloud. For small parties, small clubs or eg. for the theaters to obtain a local fog filling effect.

Power Supply: 230V, 50Hz
Tank capacity: 0.3l
Warm-up time approx.: 8min
Control: wired remote control, wireless remote control
Dimensions: 19cm x 16cm x 26cm
Weight: 2.5kg



FLZ-2000 LED FOG Machine DMX RGB 3in1

[F5100331]

Large smoke generator equipped with 8 LEDs. Allows to create great effects while generating a stream of smoke without the need for adding external light source. DMX signal handling greatly facilitates the work and allows to synchronize the device with other elements of the light scene to give a great show.

Power consumption: 1500W
Power supply voltage: 110 - 220V, 50/60Hz
LED: 8x3W, 3in1, RGB
Tank capacity: 2,5l
Warm-up time approx.: 8min
Fog output: 20 000cuf/min
Control: DMX512
Dimensions: 26cm x 22cm x 47cm
Weight: 8,9kg



FLZ-2000

FOG Machine DMX + Wireless

[F5100304]

The standard, versatile smoke machine with DMX control feature. Parameters of smoke exhaust have been selected in such a way that the device can be used both in small/medium venues and larger events.

Power consumption: 1500W
 Power supply voltage: 230V, 50/60Hz
 Tank capacity: 2,5l
 Warm-up time approx.: 10min
 Control: DMX512, wireless remote control
 Dimensions: 26cm x 22cm x 47cm
 Weight: 8,9kg



FLM-2000

FOG Machine Remote Control

[F5100306]

The standard, versatile smoke machine with wired and wireless remote control feature. Parameters of smoke exhaust have been selected in such a way that the device can be used both in small/medium venues and larger events.

Power consumption: 1500W
 Power supply voltage: 230V, 50/60Hz
 Tank capacity: 2l
 Warm-up time approx.: 8min
 Control: wired remote control, wireless remote control
 Dimensions: 26cm x 22cm x 47cm
 Weight: 8kg



FLM-1200 LED

FOG Machine RGB 3in1

[F5100308]

Large smoke generator equipped with 8 LEDs. Allows to create great effects while generating a stream of smoke without the need for adding external light source. The included remote control allows easy device management.

Power consumption: 1100W
 Power supply voltage: 220 - 240V, 50/60Hz
 LED: 6x3W, 3in1, RGB
 Tank capacity: 1l
 Warm-up time approx.: 7min
 Control: DMX512, wired remote control, wireless remote control
 Dimensions: 21cm x 19cm x 35cm
 Weight: 4,4kg



FLM-1500 Ver.II

FOG Machine Remote Control

[F5100333]

Powerfull smoke machine with wired and wireless remote control. Parameters of smoke exhaust have been selected in such a way that the device can be used in wide range of applications.

Power consumption: 1320W
Power supply voltage: 230V, 50/60Hz
Tank capacity: 2,25l
Warm-up time approx.: 7min
Control: wired remote control, wireless remote control
Dimensions: 16cm x 25cm x 47cm
Weight: 5,8kg



FLM -1200

FOG Machine Remote Control

[F5100307]

The standard, versatile smoke machine with wired and wireless remote control feature. Parameters of smoke exhaust have been selected in such a way that the device can be used in small or medium events.

Power consumption: 1100W
Power supply voltage: 230V, 50/60Hz
Tank capacity: 1l
Warm-up time approx.: 7min
Control: wired remote control, wireless remote control
Dimensions: 21cm x 19cm x 35cm
Weight: 4,4kg



HAZER 1500 Ver.II

DMX Haze Machine

[F5100335]

The machine is designed to generate dispersed fog continuously. Unlike standard smoke machines that generates large amount of smoke at intervals Hazer operates continuously and provides the fill of the room with uniform fog.

Power Supply: 230V, 50Hz
Tank capacity: 1,4l
Continous fog generation
Built-in fan
Warm-up time approx.: 8min
Control: wired remote control (with Timer), DMX512
Dimensions: 28cm x 26cm 63cm
Weight: 9kg



FLM-600

MINI FOG Machine

[F5100314]

Mini smoke machine for small parties, small clubs or eg. for the theaters to obtain a local fog filling effect.

Power Supply: AC 230V/ 50Hz
Tank capacity: 0.3l
Warm-up time approx.: 8min
Control: wired remote control, wireless remote control
Dimensions: 19cm x 16cm x 26cm
Weight: 2.5kg



DMX SPLITTER

8 Channels

[F6000362]

8-channel DMX splitter with full electronic signal separation for all connectors. Each connector has a dedicated signal presence indicator. Invaluable in systems where used to be a large number of fixtures controlled by a single DMX controller. It also solves the problems of DMX signal degradation which occurs when connecting multiple devices in one line.

Power supply: 90 - 230V, 50Hz
Independent driver for each output
DATA+ and DATA- indicator for each output
Link out ON/OFF switch
Up to 32 units per output channel



Artnet to DMX 8x512

8 port node / splitter

[F9000381]

Rack-mountable Art-Net to DMX adapter with an integrated DMX splitter and Art-Net hub capability. It has two 3-pin DMX IN ports and eight 3-pin DMX OUT ports, all optically separated. Allows to create a complex DMX system infrastructure.

2x DMX IN
8X DMX OUT
Ethernet (RJ-45) input
Ethernet (RJ-45) thr
Supports 8 Art-Net universes (8x515 DMX channels) simultaneously



USB DMX Interface

SUSHI DMX Controller

[P6000003]

Transform your computer into a powerful lighting controller!

USB dmx interface
128 channels (expandable to 512)
Windows compatible software included (free)



Wireless DMX Transceiver/Receiver

2,4GHz

[F6000364]: TRANSCIVER

[F6000365]: RECEIVER

Transmitter and receiver for wireless DMX transmission system operating in the 2.4GHz band. The system allows the transmission of DMX signal from the console to the controlled device or between devices wirelessly, allowing to completely eliminate the drawbacks relating to the wiring eg. in inaccessible places, or to save a considerable amount of time required for the installation of lighting scenes.

No time delay
Working distance distance: 600m (open space, depending on the environment conditions)
Frequency: 2,400 - 2,4835GHz, ISM, 126 RF channels
Modulation: GFSK
Maximum Transmit Power: 23dBm
Receiver Sensitivity: -94dBm
DMX Signal Interface RS485
Power supply: 9 - 22VDC





500Kg Double
[F0000006]



500Kg
[F0000005]



200Kg
[F0000041]



200Kg
[F0000003]



100Kg
[F0000009]



150Kg
[F0000039]



100Kg
[F0000038]



30Kg
[F0000004]



FLASH

Flash-Butrym Sp.j
Skarbimierzyce 18
72-002 Dołuje, Poland
Tel.: +48 786 840 459
Email: sales@flash-butrym.pl

www.flash-butrym.pl



Fundusze Europejskie
Inteligentny Rozwój



**Rzeczpospolita
Polska**



Unia Europejska
Europejski Fundusz
Rozwoju Regionalnego

